


Diâmetros Mínimos Tambores

Correias Nervuradas

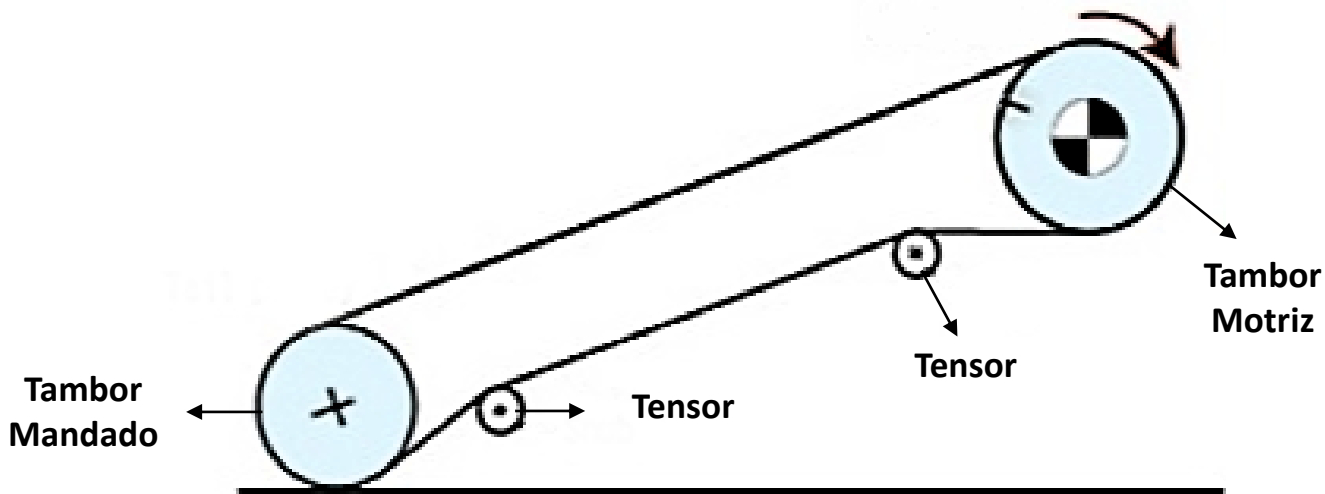

Altura da Nervura	Carga de Ruptura (N/mm)	Tambor Motriz (mm)	Tambor Mandado (mm)	Tensor (mm)
6mm	250/2	250	250	160
	400/3	315	250	200
	500/3	400	350	250
12,5mm ~ 17mm	250/2	300	250	200
	400/3	350	315	250
	500/3	500	400	350
25mm ~ 32mm	250/2	300	215	250
	400/3	400	350	315
	500/3	500	400	350
	630/4	600	500	400